


Drill powered washing shaft CS-3 / CS-5 / CS-8



Combi-shaft (CS) is a duct washing tool that combines a flexible shaft for brushing and a high-pressure hose for foaming and rinsing. Available in multiple lengths, our Combi-shaft is recommended for washing short grease ducts between 125 and 315mm in diameter and is also a great tool for cleaning grease ducts from the rooftop.

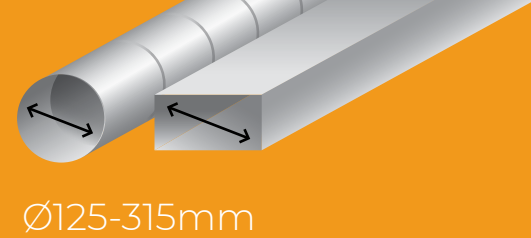

Requires:



to rotate the brush



to generate the foam and inject it through the Combi-shaft's high-pressure hose



to inject the water through the Combi-shaft's high-pressure hose for rinsing

- 2 in 1: Brushing and rinsing functions
- Hose withstands foam or water jet up to +90°C and 150 bar
- Can be used in areas without electricity
- Suitable to use in very confined areas
- Simple and low cost tool
- Ultra light and easy to carry



Technical Specifications	CS-3	CS-5	CS-8
Multitube hose length	3m	5m	8m
Weight	3kg	4kg	6kg
Shaft core type	flexible		
Brush rotation direction	left/right		
Compatible brush type	C-brushes*		
Foaming and rinsing hose system	high-pressure hose integrated (up to +90°C and 150 bar)		
Compatible nozzle type	quick connect foaming and rinsing nozzles*		
Foaming source	foam tank*		
Power source	drill**		

Recommended accessories:

(see Accessories on pp.14-17)

*sold separately
** not included

- C-brushes
- HW-45T Hot water high pressure washer
- Foaming and rinsing nozzles
- Foam tank

