


Electric brushing machine E-20 / E-30 / E-20 batt




100-400mm

This compact brushing device with powerful electric motor and integrated retractable flexible shaft is an excellent choice for cleaning small air ducts with multiple 90° curves and diameter up to 400mm.

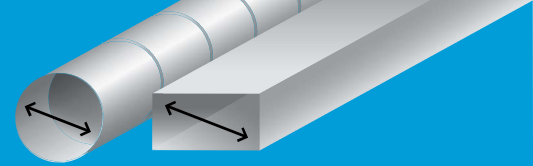

- Compact and easily operated by one person
- Long-lasting, powerful EC motor
- Durable and highly flexible shaft
- Retractable reel system
- Automatic shaft safety stop system in case brush gets jammed
- Fast and easy brush replacement without tools
- User-friendly control panel
- Remote control
- Lightweight, easy to manoeuvre and transport
- E-20 also available as battery operated version

Wireless remote control

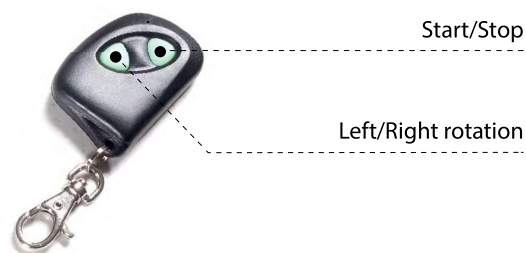

E-brush Ø100-400mm

Easy brush replacement without tools

Easy-detach slots for 18V batteries (in E-20 batt version)

Adjustable rotation direction




Adjustable rotation speed

Emergency stop

Flexible shaft 20m or 30m



Technical Specifications	E-20	E-30	E-20 batt
Shaft length	20m	30m	20m
Dimensions (LxHxW)	70x71x37cm	70x71x44cm	70x71x37cm
Frame structure		aluminium	
Weight	28kg	33kg	28kg
Brush rotation direction		left/right	
Brush rotation speed		up to 1100 rpm	
Safety stop system		integrated	
Motor type		EC motor	
Power supply	1 phase, 110-230V, 50-60Hz, 10A		1-2 units 18V battery
Wired remote control		optional	
Wireless remote control		optional	



Recommended accessories:

- E-brushes • Centering brushes
- Charger + battery pack (for E20 batt)
- Vacuum discs

Vacuum-filter machine SFU-50

4500 m³/h

SFU-50 is a powerful compact vacuuming device with integrated filtering system and adjustable airflow. It is ideal for cleaning medium to large ventilation duct systems in buildings where only one phase power supply is available. It is appropriate for ducts up to 630mm in diameter.



- High airflow and pressure
- Long-lasting, powerful EC motor
- Only 1 phase power supply required
- Works in vertical and horizontal position
- G3 pre-filters, F7, H13 HEPA and Activated carbon filters available
- Filters are easy to replace
- Compact, easy to manoeuvre and transport




Control panel



On/Off switch

Adjustable airflow

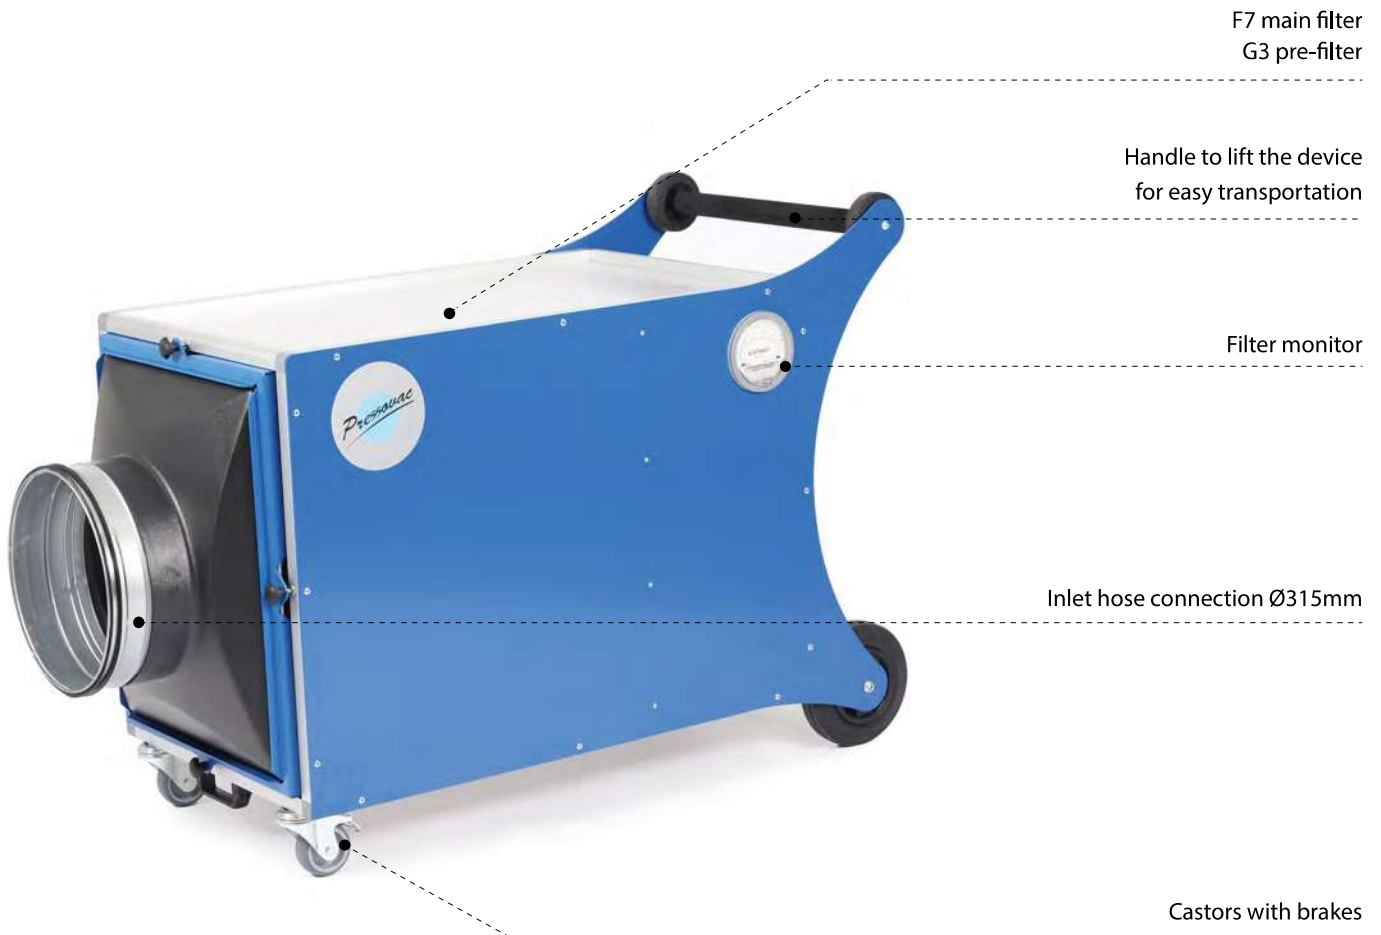

Technical Specifications	SFU-50
Maximum airflow	4 500m ³ /h
Maximum pressure	1100Pa
Motor type	EC motor
Power supply	1 phase, 200-277V, 50-60Hz, 10A
Dimensions (LxHxW)	127x88x63cm
Frame structure	aluminum
Weight	48kg
Adjustable airflow	10-100%
Power outlet	integrated
Inlet and outlet hose connection	Ø315mm
Filter monitor	included
G3 pre-filter	optional
F7 compact filter	optional
H13 HEPA filter	optional
Activated carbon filter	optional

Recommended accessories:

(see Accessories on p. 27)

- Air transfer hoses
- Air exhaust hoses
- Barrage plugs

